


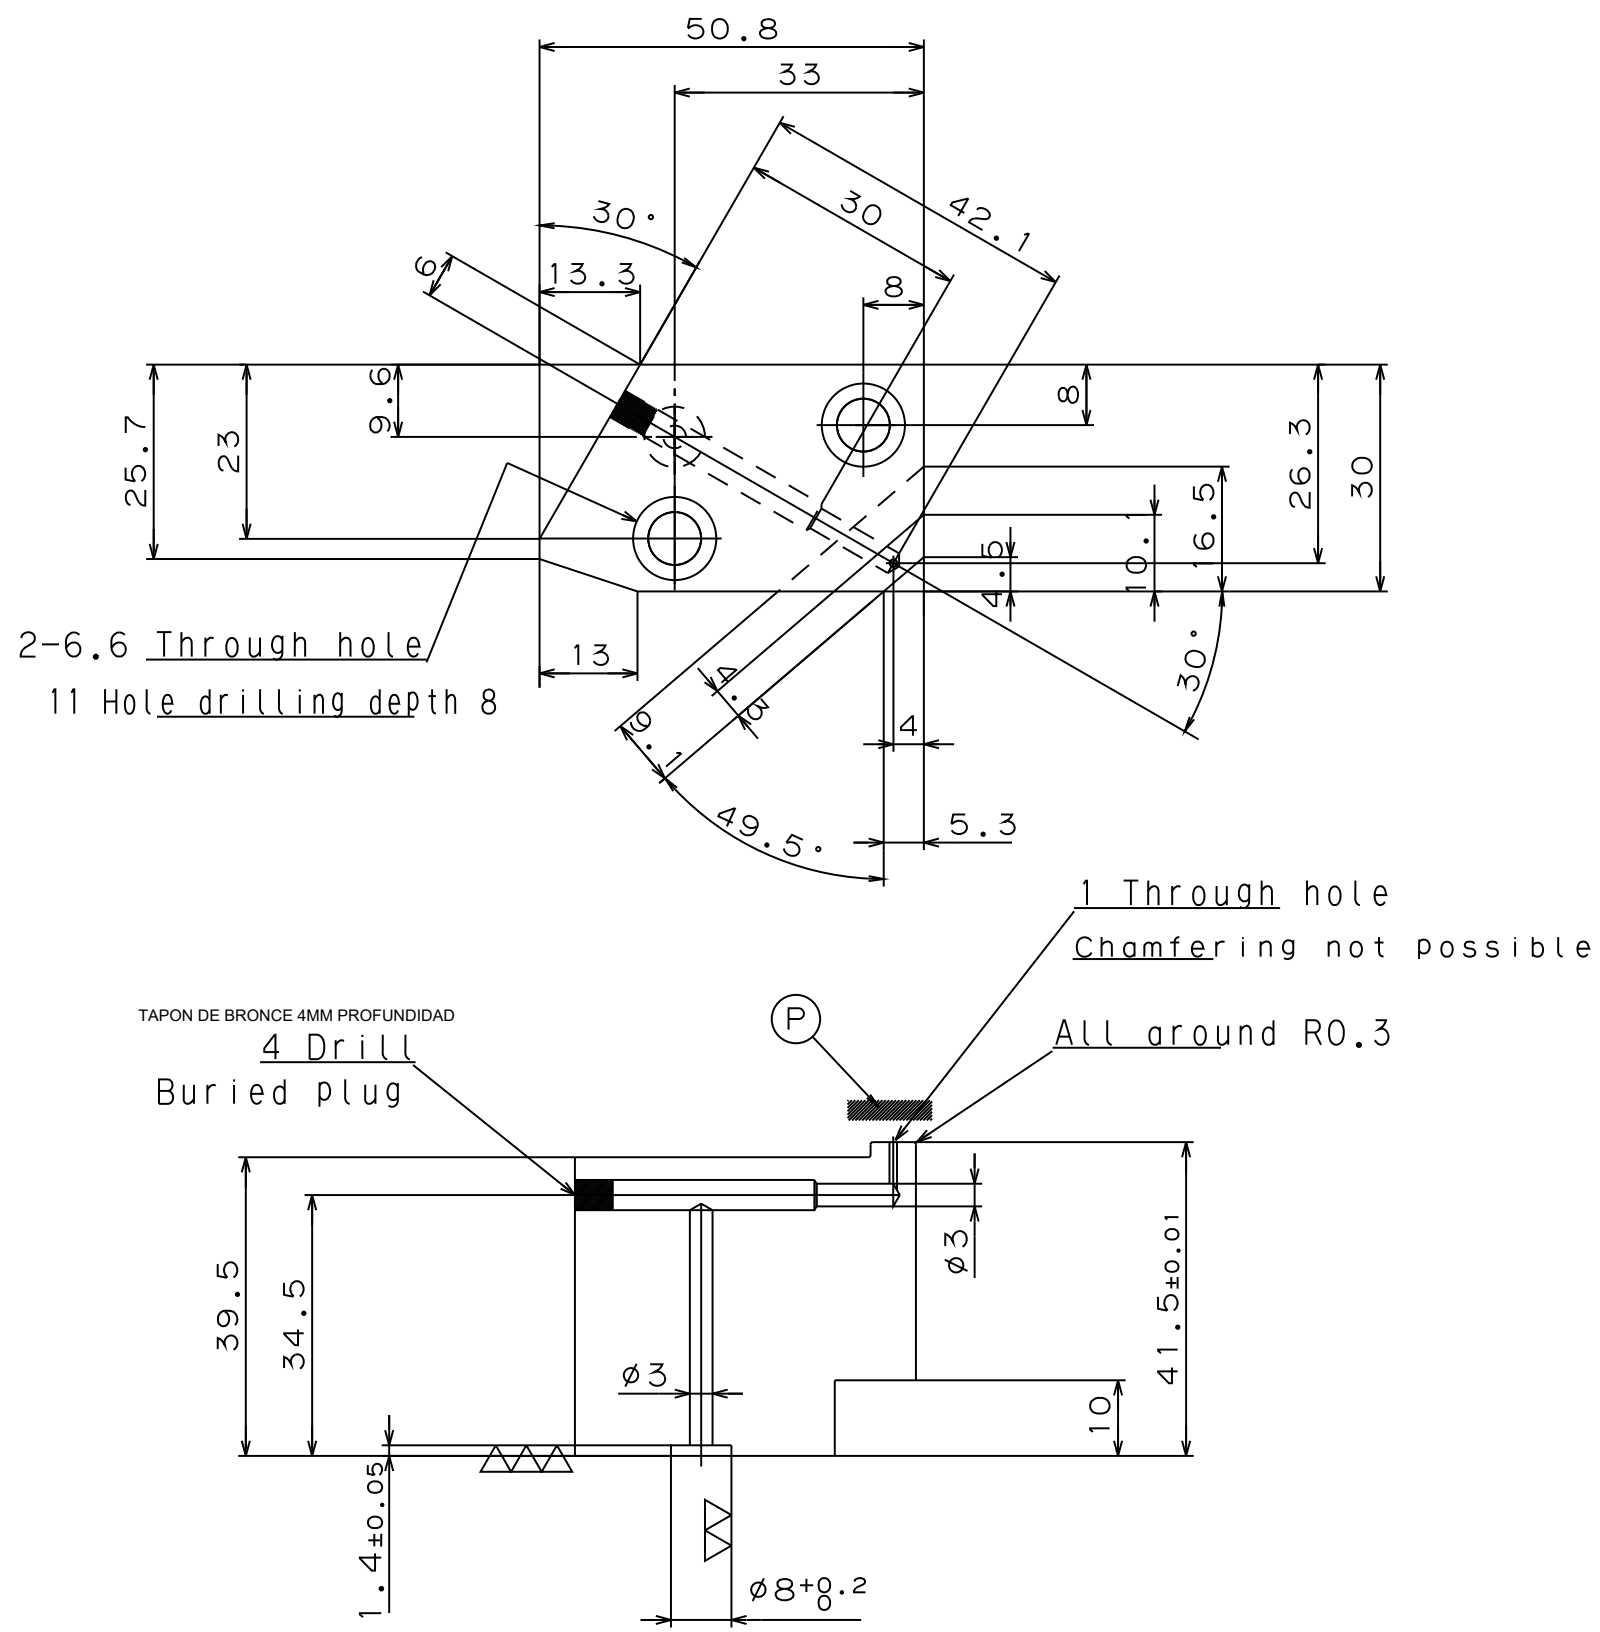

Report	
Heat treatment	
P Part high frequency	
Quenching and tempering	
H _R C 50~55	
Surface treatment	
Black dyed	
Third each painting method	
Normal dimensional tolerance(unit:mm)	
More than 1 less than 4	±0.1
More than 4 less than 16	±0.2
More than 16 less than 63	±0.3
More than 63 less than 250	±0.6
More than 250 less than 1000	±0.8
Out of description finish	
Each corner without instruction is C0.5 chamfer	
Approved	
Checked	
Drawn	
MU	

Bolt with hole	M6X40	2						Scale	1/1	Q'ty	1	Part name	Pad P2	
O ring	P5	1						Material		S55C		Unit name	CASE equipment deburring machine	
								Date		'19.03.28		Machine name		
Part name	Type	Q'ty	Note	Code	Date	Revisions	Reviser	Star tech Co.,Ltd.		Drawing No.	TSC539-J1019			